



March 31, 2026

CITY OF KENORA

**TENDER #313-001-25
2026 City of Kenora Municipal Paving Program**

ADDENDUM No. 2

This Addendum is issued to clarify the tender documents prior to tender closing, for the above captioned tender call.

The following modifications are hereby made a part of the Tender document and all of their effect is to be included in the tender prices.

Revisions to Tender Documents:

Referring to the Unit Price Schedules Section B – Lakeview Drive - Parsons Street Intersection:

Bidder shall remove and replace the Unit Price Schedule for Section B – Lakeview Drive - Parsons Street Intersection with the attached revised unit price schedule. The revised unit price schedule for Section B shall be submitted with the bid. For clarity, the revised unit price schedule includes the following changes:

Item B-29: Item Description

Remove:

B-29	Relocate Water Fountain	SP	N	LS	1		
------	-------------------------	----	---	----	---	--	--

Replace With:

B-29	Removal of Water Fountain	SP	N	LS	1		
------	---------------------------	----	---	----	---	--	--

Referring to APPENDIX H SPECIAL PROVISIONS of the tender documents:

Remove:

Section 1.29 Relocate Water Fountain in its entirety

and replace with:

Section 1.29 Removal of Water Fountain

This Special Provision covers the demolition and removal of the existing water fountain at the southwest corner of the intersection of Lakeview Drive and Parsons Street, including demolition and removal of the existing concrete base.

GENERAL



Demolition and removal of the water fountain shall be completed in consultation with the Contract Administrator and the City of Kenora.

CONSTRUCTION

The Work shall include, but is not limited to, the following:

- Disconnection of existing water and sewer services,
- Demolition and removal of the existing water fountain;
- Demolition and removal of the existing concrete base;

All work shall be completed in accordance with the Contract Documents and to the satisfaction of the Contract Administrator and the City of Kenora.

MEASUREMENT FOR PAYMENT


Measurement for payment shall be lump sum.

BASIS OF PAYMENT

Payment at the Contract Price for Removal of Water Fountain shall include full compensation for: coordination with the Contract Administrator and the City of Kenora; demolition and disposal of the existing concrete base; demolition and disposal of the water fountain; disconnecting of existing services; and all labour, materials, equipment, and incidentals required to complete the Work.

No separate payment will be made for any part of this Work.

Item#	Item Description	Spec. Ref.	Quant. Sheet	Unit	Est. Quant.	Unit Rate	Total Price
Item#	Item Description	Spec. Ref.	Quant. Sheet	Unit	Est. Quant.	Unit Rate	Total Price
Section B Lakeview Drive - Parsons Street Intersection							
B-1	Earth Excavation, Grading	206 - SP	N	m ³	200		
B-2	Hot Mix HL3 - 50mm Lift Thickness	310 - SP	N	m ²	955		
B-3	Hot Mix HL8 - 70mm Lift Thickness	310 - SP	N	m ²	15		
B-4	Hot Mix HL3 - 50mm Lift Thickness (Multi-Use Path)	310 - SP	N	m ²	705		
B-5	Asphalt Boulevard	311 - SP	N	m ²	155		
B-6	Granular A	314 - SP	N	t	405		
B-7	Granular B Type II	314 - SP	N	t	10		
B-8	Earth Borrow	212 - SP	N	m3	510		
B-9	Concrete Sidewalk	351 - SP	N	m ²	110		
B-10	Curb Faced Concrete Sidewalk	351 - SP	N	m ²	35		
B-11	Tactile Walking Surface Indicators for Concrete Sidewalk Ramps	351 - SP	N	m ²	21		
B-12	Concrete Barrier Curb, OPSD 600.110	353 - SP	N	m	365		
B-13	Adjust Manhole/Catch Basin	408 - SP	N	Each	1		
B-14	Removal of Asphalt Pavement, Full Depth	510 - SP	N	m ²	340		
B-15	Removal of Asphalt Pavement, Partial Depth - 50mm	510 - SP	N	m ²	917		
B-16	Removal of Concrete Curb	510 - SP	N	m	60		
B-17	Removal of Concrete Curb and Sidewalk	510 - SP	N	m ²	320		
B-18	Removal of Steel Beam Guide Rail	510 - SP	N	m	118		
B-19	Traffic Control Signing	706 - SP	N	LS	1		
B-20	Pavement Markings	710 - SP	N	m	600		
B-21	Pavement Marking, Durable	710 - SP	N	m	26		
B-22	Pavement Marking Symbols	710 - SP	N	Each	20		
B-23	Traffic Signal Works	SP	N	LS	1		
B-24	Install Steel Beam Guide Rail	721 - SP	N	m	25		
B-25	Install Steel Beam Energy Attenuating Terminal	732 - SP	N	Each	3		
B-26	Topsoil - 50mm Depth	802 - SP	N	m ²	450		
B-27	Sod	803 - SP	N	m ²	450		
B-28	Relocate Transit Shelter	SP	N	LS	1		
B-29	Removal of Water Fountain	SP	N	LS	1		
B-30	Remove and Salvage Concrete Barriers	SP	N	LS	1		
Section B - Lakeview Drive - Parson Street Intersection Subtotal							

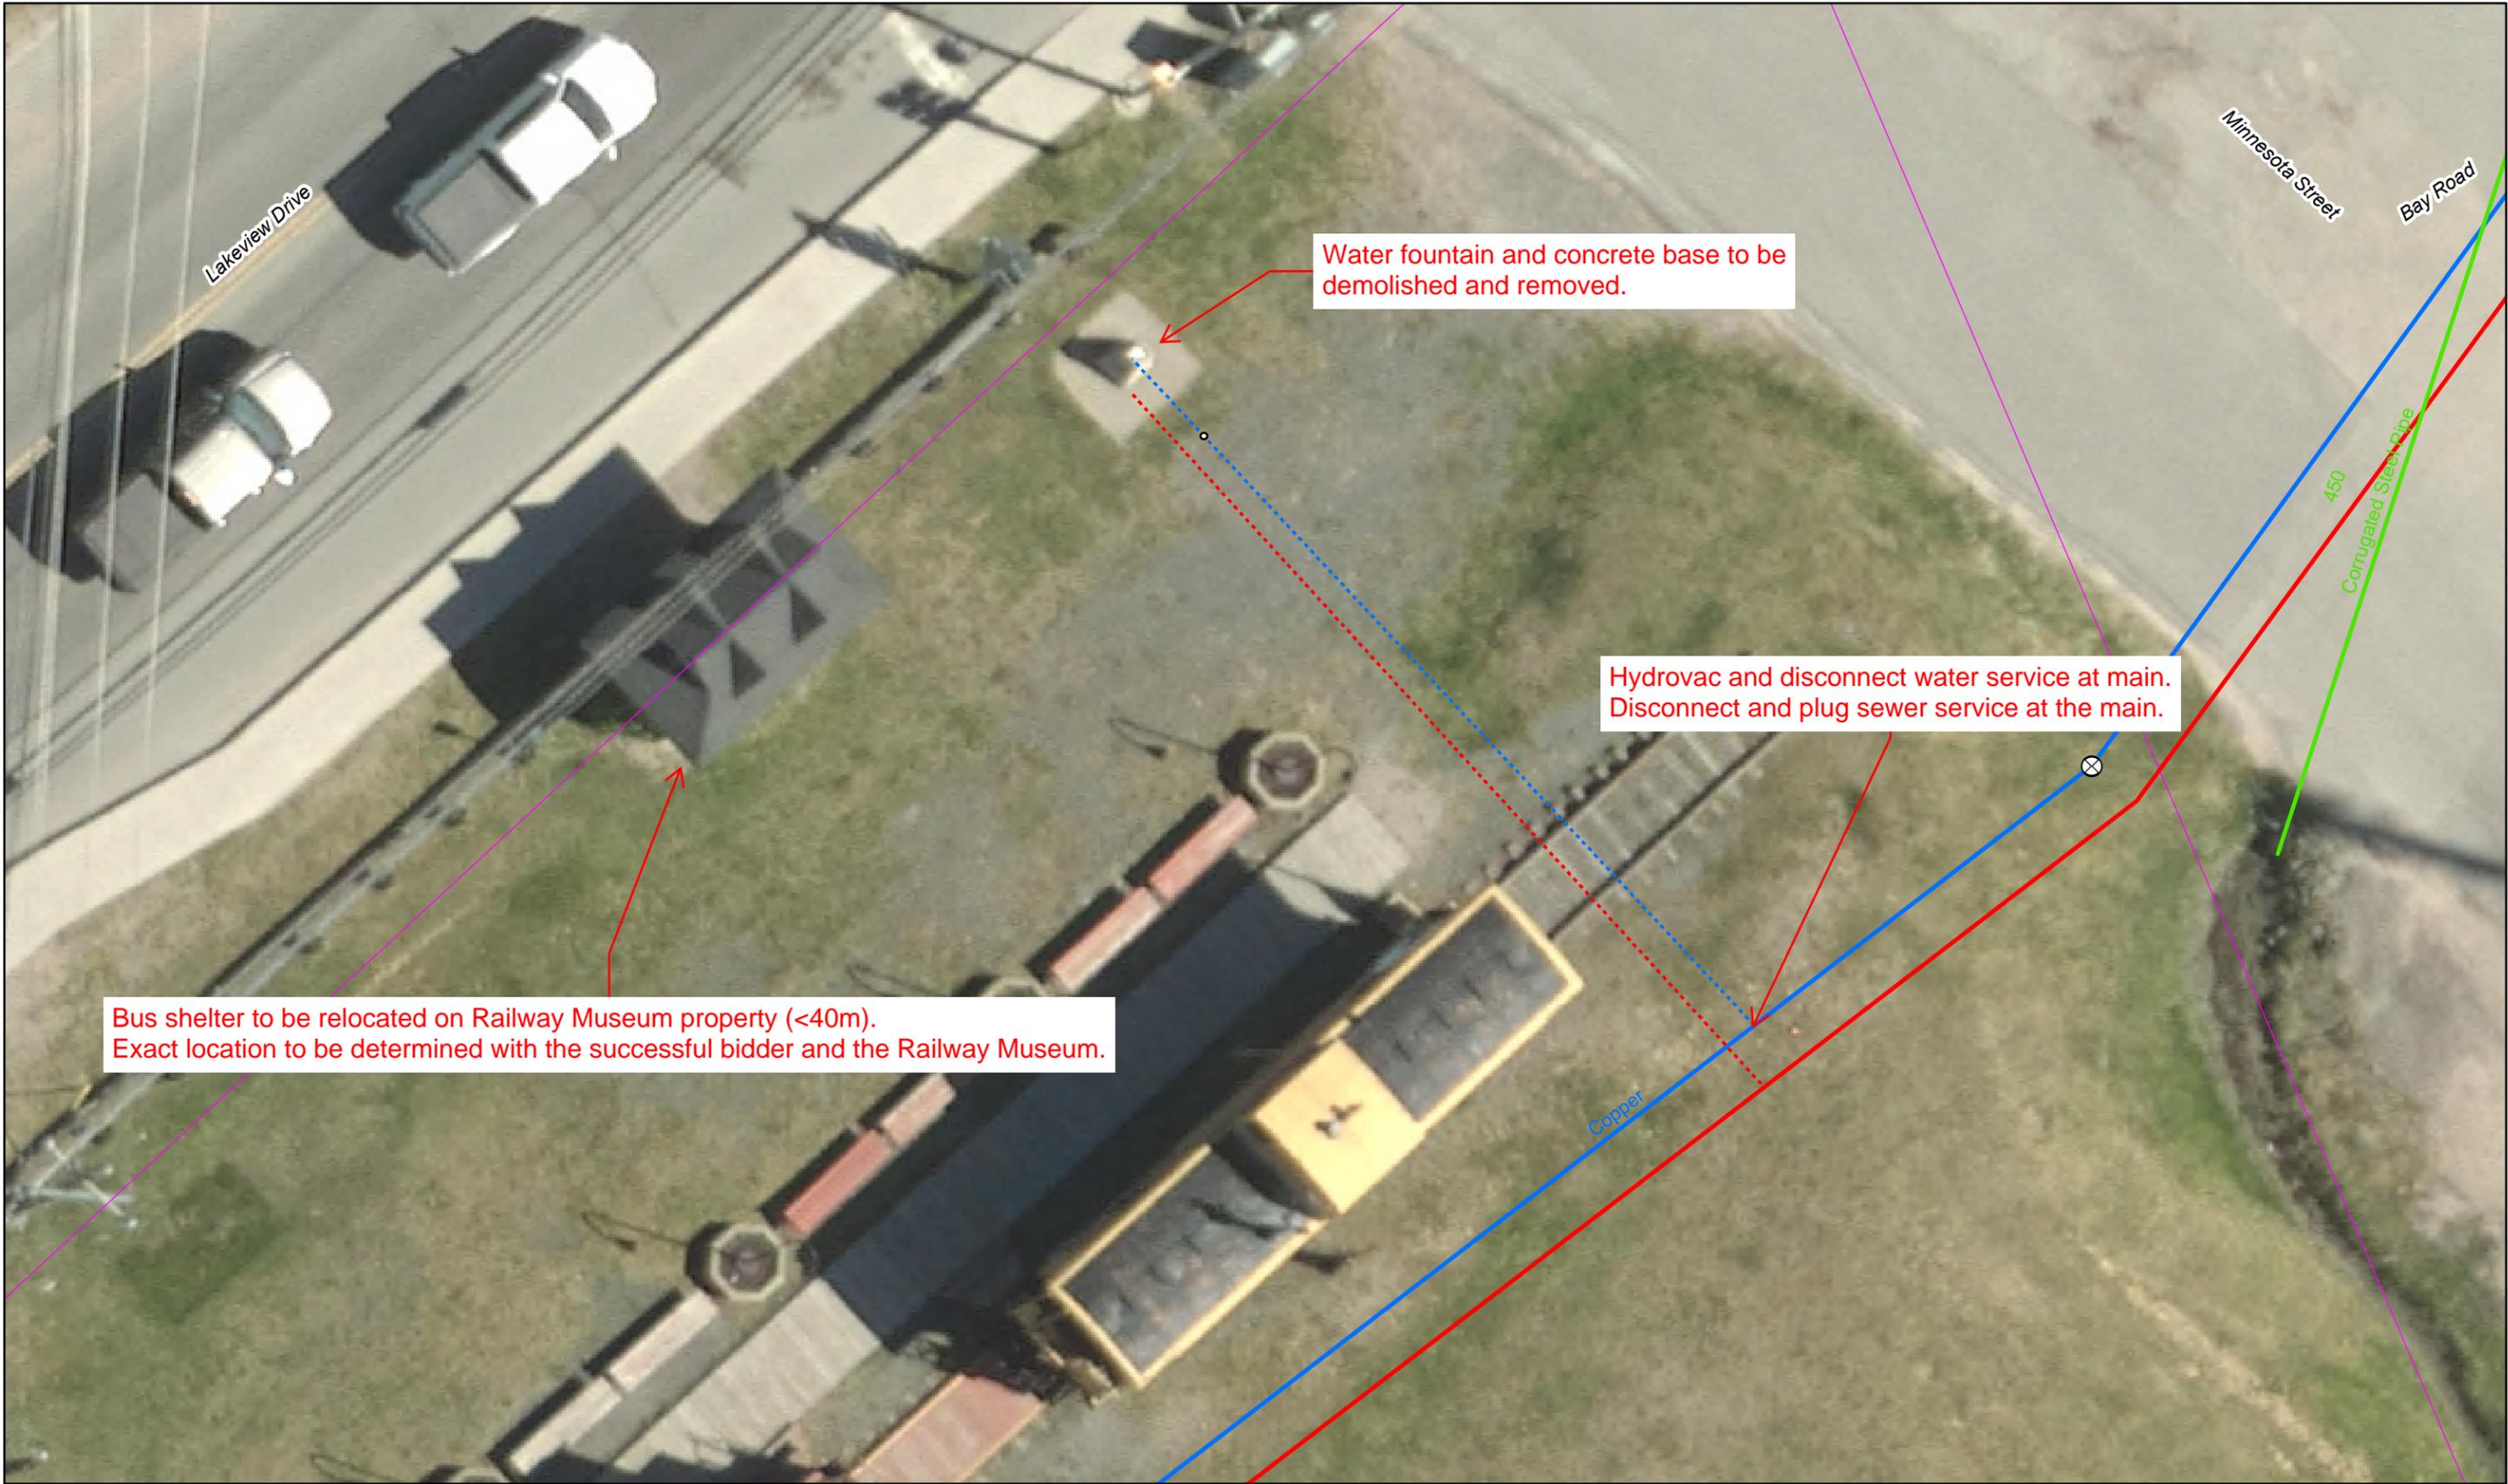

Water fountain and concrete base to be demolished and removed.

Hydrovac and disconnect water service at main.
Disconnect and plug sewer service at the main.

Bus shelter to be relocated on Railway Museum property (<40m).
Exact location to be determined with the successful bidder and the Railway Museum.

Lakeview Drive

Minnesota Street

Bay Road

450
Corrugated Steel Pipe

Copper